

3600 SERIES

SPRA-GARD EFFICIENCY RP PAINT ARRESTORS



OVERVIEW: The 3600 Series offers both longevity and efficiency. This series has all of the advantages of the 3200 Series plus a longer service life. This product works well in high volume spray applications because the high capacity spray paper provides service life and the polyester provides high efficiency for small particles. Cleaner paint exhaust stacks and fewer changes of product make the 3600 a preferred total cost solution for many overspray applications. Available in pads and rolls.

PAINT ARRESTOR IDENTIFICATION

Model: 3600 Series Spr-Gard High Efficiency RP Paint Arrestor

RP Part Number: 3632 Pad (20" x 20")

Number of pads in series: 1

TEST INFORMATION

Paint Description: High Solids Baking Enamel

(S.W. #1 Permaclad 2400, red)

Paint Spray Method: Conventional Air Gun at 40 PSI Spray

Feed Rate: 142 grains/min. 135 cc./min.

Air Velocity: 150 FPM

TEST RESULTS

Initial Pressure Drop of Clean Test Filter: 0.04 in. wg

Final Pressure Drop of Loaded Test Filter: 0.18 in. wg


Paint Holding Capacity of Test Filter: 2473 grams = 5.5 lb.

Average Removal Efficiency of Test Filter: 99.75%


Product Tested by LMS Technologies, Inc.

TEST SUMMARY:


CLEAN FILTER

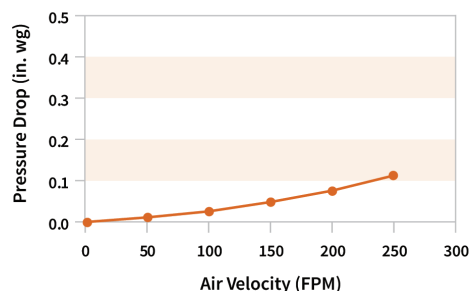

PRESSURE DROP

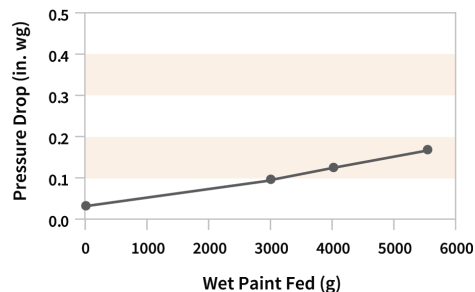

% REMOVAL EFFICIENCY

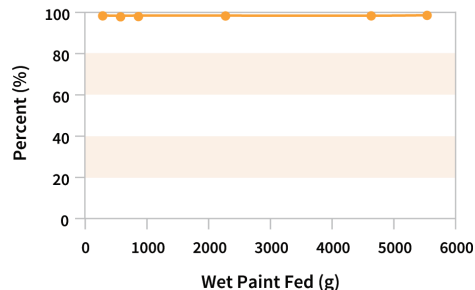

Copyright ©2020 RTT ES | Form LF-1004